


# relo

Downlight

Simply versatile

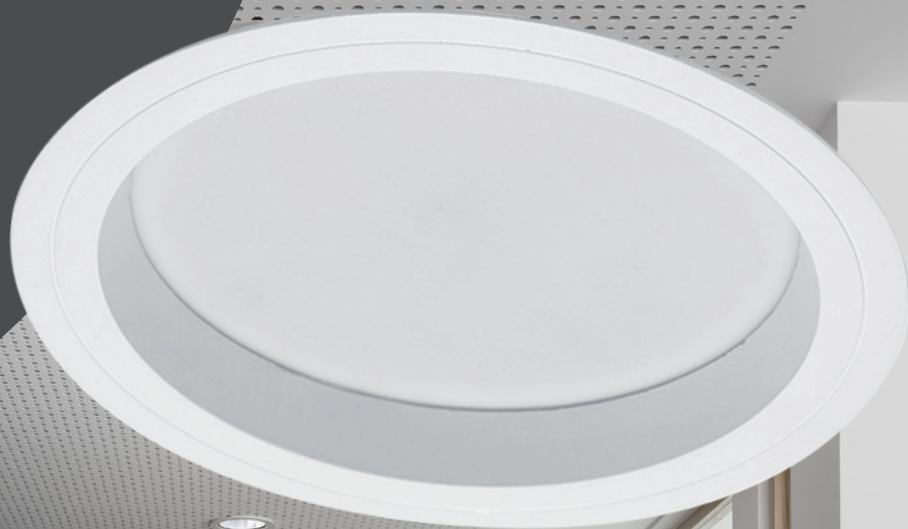

## Application areas

- » Quiet rooms and guest rooms
- » Wellness rooms
- » »reatment rooms
- » Stairwells
- » Foyers and lobbies
- » Corridors
- » Waiting areas

**NEW:**  
Increased efficiency,  
higher luminous flux, and  
multi-lumen

# REGIOLUX

| Type            | Fittings          | Colour | Ballast             | LxBxH/DxH [mm] | lm/W    | P <sub>sys</sub> [W] | Art. No.      |
|-----------------|-------------------|--------|---------------------|----------------|---------|----------------------|---------------|
| relo-RDES-O/140 | LED 1900-600 830  | ws     | ETM                 | 140 x 45       | 99-106  | 6-18                 | 3763 1114 140 |
|                 | LED 1900 830      | ws     | DALI2 <sup>1)</sup> | 140 x 45       | 106     | 18                   | 3763 1116 640 |
|                 | LED 2000-600 840  | ws     | ETM                 | 140 x 45       | 102-109 | 6-18                 | 3763 1104 140 |
|                 | LED 2000 840      | ws     | DALI2 <sup>1)</sup> | 140 x 45       | 109     | 18                   | 3763 1106 640 |
| relo-RDES-O/190 | LED 2200-700 830  | ws     | ETM                 | 190 x 59       | 110-122 | 6-18                 | 3763 2114 140 |
|                 | LED 2200 830      | ws     | DALI2 <sup>1)</sup> | 190 x 59       | 122     | 18                   | 3763 2116 640 |
|                 | LED 2300-700 840  | ws     | ETM                 | 190 x 59       | 114-126 | 6-18                 | 3763 2104 140 |
|                 | LED 2300 840      | ws     | DALI2 <sup>1)</sup> | 190 x 59       | 126     | 18                   | 3763 2106 640 |
| relo-RDES-O/230 | LED 3400-1700 830 | ws     | ETM                 | 230 x 59       | 124-125 | 14-28                | 3763 3114 140 |
|                 | LED 3400 830      | ws     | DALI2 <sup>1)</sup> | 230 x 59       | 125     | 28                   | 3763 3116 640 |
|                 | LED 3500-1800 840 | ws     | ETM                 | 230 x 59       | 127-128 | 14-28                | 3763 3104 140 |
|                 | LED 3500 840      | ws     | DALI2 <sup>1)</sup> | 230 x 59       | 128     | 28                   | 3763 3106 640 |


<sup>1)</sup>Luminaires suitable for the IoT (Internet of Things): 

| Accessories         | Type               | Colour      | Material | Details                                                        | Art. No.      |  |
|---------------------|--------------------|-------------|----------|----------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|
| Loop-through wiring | DV-BOX ET ET/ETM   | sw RAL 9005 | Mix      | DV-BOX ET/ETM for lowea, panella, scota, relo, tevi und changy | 7991 0001 100 | 1                                                                                   |
| Ceiling mounting    | RDES-AR 190        | vw RAL 9016 | St       | Mounting frame for relo 190                                    | 3767 9001 100 | 1                                                                                   |
|                     | RDES-AR 230        | vw RAL 9016 | St       | Mounting frame for relo 230                                    | 3767 9002 100 | 1                                                                                   |
| Refurbishment ring  | relo-SR 140 AD 170 | vw RAL 9016 | St       | for relo/140                                                   | 3767 1000 206 | 1                                                                                   |
|                     | relo-SR 140 AD 185 | vw RAL 9016 | St       | for relo/140                                                   | 3767 1000 208 | 1                                                                                   |
|                     | relo-SR 140 AD 280 | vw RAL 9016 | St       | for relo/140                                                   | 3767 1000 212 | 1                                                                                   |
|                     | relo-SR 190 AD 210 | vw RAL 9016 | St       | for relo/190                                                   | 3767 1000 207 | 1                                                                                   |
|                     | relo-SR 190 AD 225 | vw RAL 9016 | St       | for relo/190                                                   | 3767 1000 210 | 1                                                                                   |
|                     | relo-SR 230 AD 270 | vw RAL 9016 | St       | for relo/230                                                   | 3767 1000 202 | 1                                                                                   |


RDES-O/140



RDES-O/190



RDES-O/230



RDES-O/.



The separate driver is easily accessible, quick to connect and thermally decoupled.



Through-wiring: As always, quick and tool-free with the DV Box ETM from the accessories.

## Highlights

- » Universal IP44 downlight family for recessed and surface mounting
- » Robust die-cast aluminium housing, driver pre-wired and ready for operation
- » Direct light distribution via opal or micro-prismatic diffuser
- » Three different sizes available, each in two light colours
- » Recessed diffuser disc for an attractive appearance

IP44

DALI

ETM


830  
840

L80  
B10  
50.000h

Image index

1.....Boris Golz, Arnsberg DE

Regiolux @ Social Media



[www.regiolux.de/en/relo](http://www.regiolux.de/en/relo)

# REGIOLUX

Regiolux GmbH  
Hellinger Straße 3  
D 97486 Königsberg  
T +49 9525 89 0  
[info@regiolux.de](mailto:info@regiolux.de)  
[www.regiolux.de](http://www.regiolux.de)